

524,402

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/015669 A1

(51) International Patent Classification⁷: **G09G 3/32**

(21) International Application Number:
PCT/IB2003/003264

(22) International Filing Date: 17 July 2003 (17.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02078319.7 12 August 2002 (12.08.2002) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VAN DER WAL, Roelf** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **DIJKMAN, Willbrodus, J.** [NL/NL];

Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **ERP, Josephus, A., M.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **LULOFS, Klaas, J.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


(74) Agent: **DEGUELLE, Wilhelmus, H., G.**; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),


[Continued on next page]

(54) Title: **AN ELECTROLUMINESCENT DISPLAY**

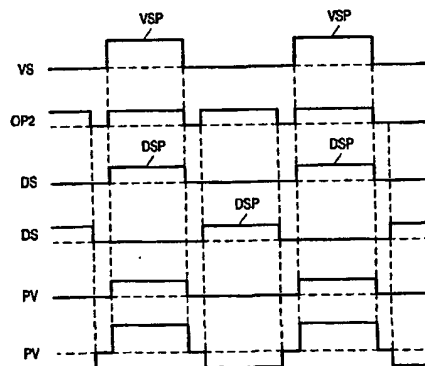

A
B
C
D
E
F

(57) Abstract: A driver circuit drives an electroluminescent display (1) which comprises a matrix of display pixels (10) associated with intersections of data electrodes (12) and select electrodes (11). The driver circuit comprises a select driver (2) which supplies a select signal (VS) comprising non-overlapping select pulses (VSP) with a predetermined repetition frequency to a selected one (11') of the select electrodes (11). The data driver (3) supplies data signals (DS) comprising data pulses (DSP) with the same predetermined repetition frequency to the data electrodes (12). The data pulses (DSP) occur during the select pulses (VSP) for data electrodes (12) of which associated pixels (10) should not produce light. The data pulses (DSP) occur in-between the select pulses (VSP) for data electrodes (12) of which associated pixels (10) should produce light.

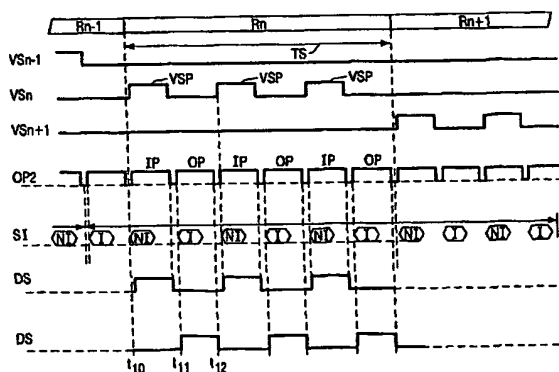

A
B
C
D
E
F
G
H

WO 2004/015669 A1